

# Glass Protect User manual




**Glass Protect** is a wireless indoor glass break detector recognizing the sound of shattering the glass at a distance of up to 9 meters. Glass Protect can operate up to 7 years from a pre-installed battery and has a socket for connecting a third-party wired detector.

Glass Protect connects to the Ajax security system via the protected Jeweller radio protocol. The communication range is up to 1,000 meters in line of sight. Also, Glass Protect can be connected to third-party security systems using the Ajax uart Bridge or Ajax oc Bridge Plus integration modules.

Users can configure Glass Protect via the Ajax app for mac OS, Windows, iOS, or Android. The system notifies users of all events through push notifications, SMS, and calls (if activated).

The user can connect the Ajax security system to the central monitoring station of a security company.

# Functional elements

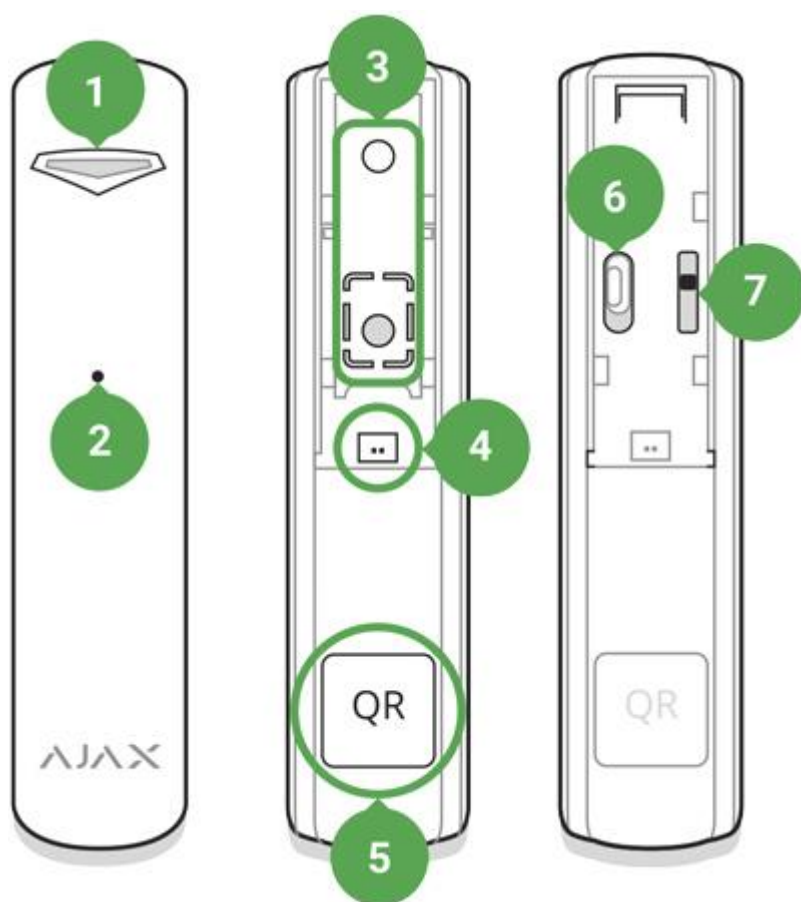

1. LED indicator
2. Microphone hole
3. Smart Bracket attachment panel (perforated part is required for actuating the tamper in case of any attempt to dismantle the detector. Don't break it out!)
4. External detector connection socket
5. QR code
6. Device switch
7. Tamper button

# Operating Principle

Glass Protect uses a sensitive electret microphone to detect the sound of glass breaking, consisting of a low-frequency hit sound and high-frequency crashing sound of glass shatters. Such two-stage glass break detection decreases the risk of false triggering.

Glass Protect detector does not react to the breaking of the film-covered glass: shockproof, sunscreen, decorative, or any other type of film. To detect the breaking of such kind of glass, we recommend using the Door Protect Plus wireless opening detector with shock and tilt sensors.

If triggered, Glass Protect immediately transmits the alarm signal to the hub, activating the sirens (if connected) and notifying the user and security company.

## Connecting

### Detector Connection to hub


#### **Before starting connection:**

1. Following the hub user guide, install the [Ajax app](#). Create the account, add the hub, and create at least one room.
2. Switch on the hub and check the internet connection (via Ethernet cable and/or GSM network).
3. Make sure that the hub is disarmed and does not update by checking its status in the Ajax app.


Only users with administrator rights can add the device to the hub.

## Pairing the detector with hub:

1. Select **Add Device** in the Ajax app.
2. Name the device, scan or type the **QR code** (located on the detector body and packaging), and select the location room.

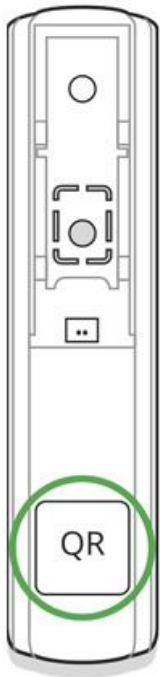

3. Tap **Add** — the countdown will start.
4. Switch on the device.

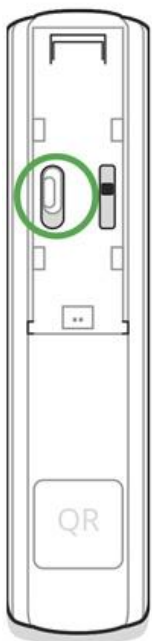

For detection and pairing to occur, the detector should be located within the coverage area of the wireless network of the hub (at a single protected object). The connection request is transmitted for a short time: at the moment of switching on the device.



If the device failed to pair (LED blinks once per second), switch it off for 5 seconds and retry. The detector connected to the hub appears in the list of devices in the app. The update of the detector statuses in the list depends on the device ping interval set in the hub settings (the default value is 36 seconds).

## Connecting to Third-Party Systems

To connect the detector to a third-party central unit using the uartBridge or ocBridge Plus integration module, follow the recommendations in the user manual of the respective device.

## States



1. Devices
2. Glass Protect

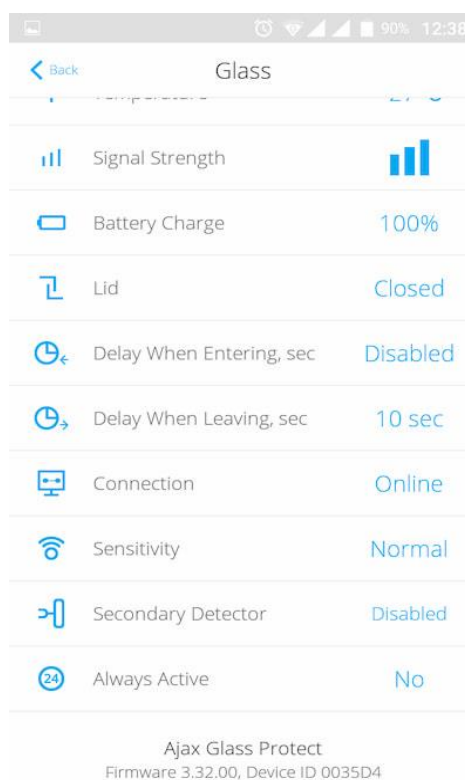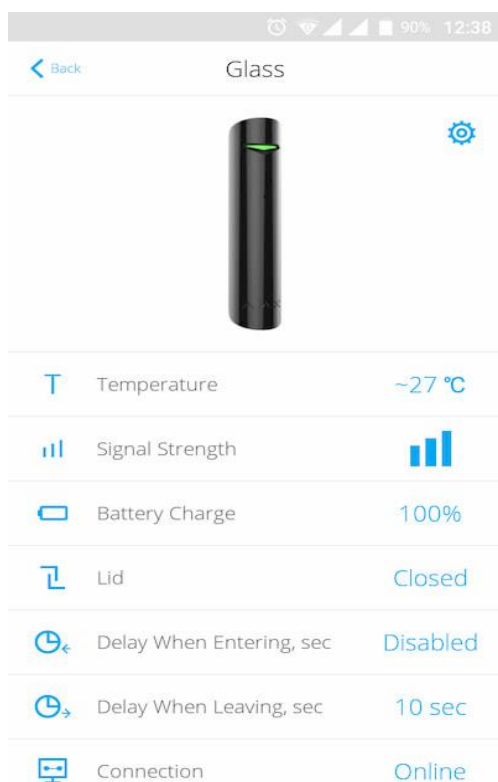

<b>Parameter</b>	<b>Value</b>
Temperature	Temperature of the detector, measured on the processor and changes gradually
Jeweller Signal Strength	Signal strength between the hub and the detector
Connection	Connection status between the hub and the detector
Battery Charge	Battery level of the detector, displayed in increments of 25%
Lid	The tamper state, which reacts to the detachment of or damage to the detector body
Delay when entering, sec	Delay time when entering. The option is available only with a connected wired detector.
Delay when leaving, sec	Delay time when exiting. The option is available only with a connected wired detector.
Sensitivity	Sensitivity level of the sensor
Secondary detector	Status of the external detector connection to Glass Protect
Routed Through ReX	Displays the status of using the radio signal range extender ReX
Always Active	Indicates whether the detector is always armed
Firmware	Detector firmware version
Device ID	Device identifier

## Settings

1. Devices
2. Glass Protect
3. Settings

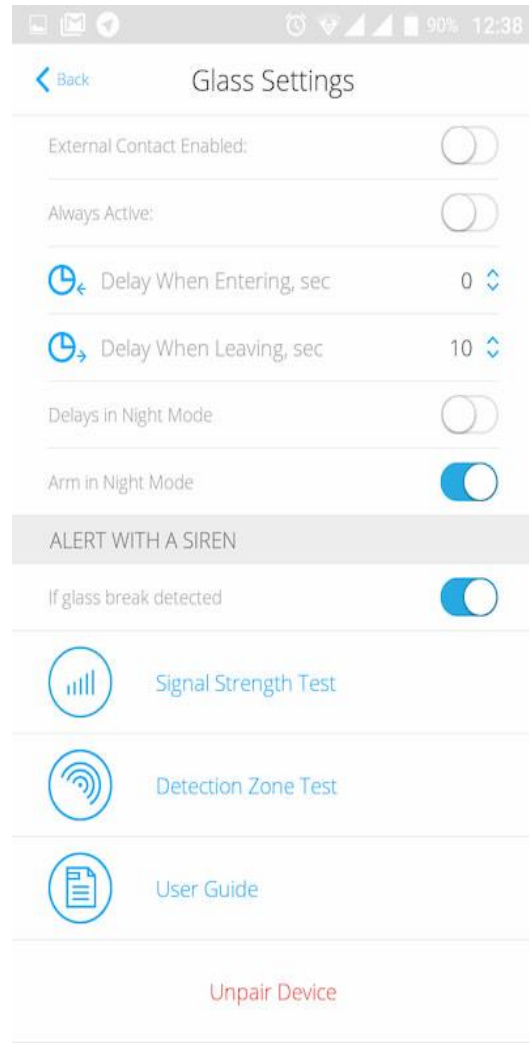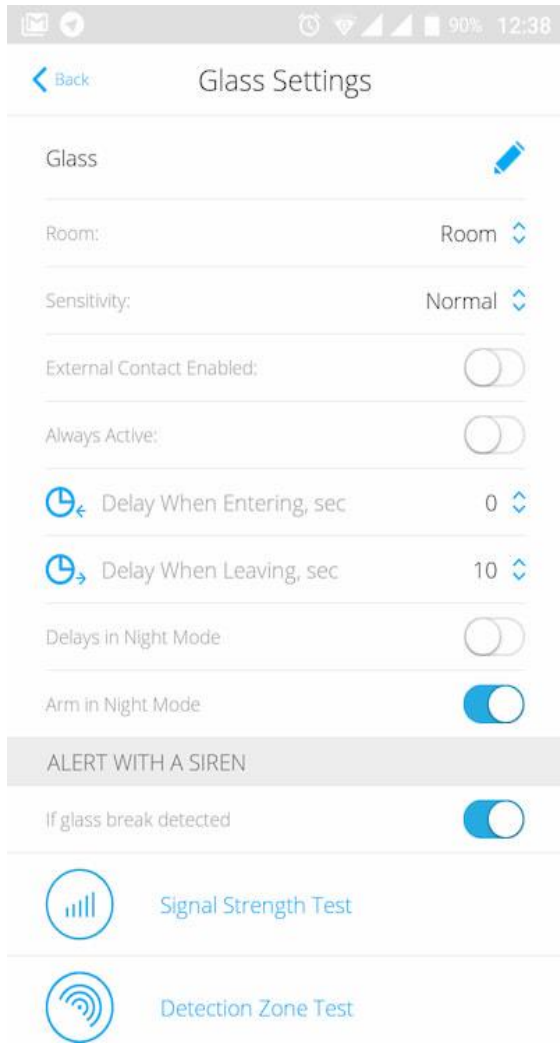

Setting	Value
First field	Detector name, can be edited
Room	Selecting the virtual room to which the device is assigned
Delay when entering, sec	Selecting delay time when entering. The option is available only with a connected wired detector.
Delay when leaving, sec	Selecting delay time on exit. The option is available only with a connected wired detector.
Delays in night mode	Delay turned on when using night mode
Arm in night mode	If active, the detector will switch to armed mode when using night mode
Sensitivity	Choosing the sensitivity level of glass break detector:  High  Normal

	Low
External contact enabled	If active, the detector registers external detector alarms
Always active	If active, the detector always registers glass breakage
Alert with a siren if glass break detected	If active, Home Siren and Street Siren are activated when the glass break detected
Activate the siren if an additional contact is open	If active, Home Siren and Street Siren are activated in case of an external detector alarm
Jeweller Signal Strength Test	Switches the detector to the Jeweller signal strength test mode
Detection Zone Test	Switches the detector to the detection area test
Attenuation Test	Switches the detector to the signal fade test mode (available in detectors with <b>firmware version 3.50 and later</b> )
User Guide	Opens the User Guide for detector
Un pair Device	Disconnects the detector from the hub and deletes its settings

## Indication

Event	Indication	Note
Turning on the detector	Lights up green for about one second	
Detector connection to the hub, ocBridge and uartBridge	Lights up continuously for a few seconds	
Alarm / tamper activation	Lights up green for about one second	Alarm is sent once in 5 seconds
Battery needs replacing	During the alarm, it slowly lights up green and slowly goes out	Replacement of the detector battery is described in the Battery Replacement manual



# Functionality testing

The Ajax security system allows conducting tests for checking the functionality of connected devices.

The tests do not start immediately but within a period of 36 seconds when using standard settings. The test time start depends on the settings of the detector scanning period (the paragraph on “**Jeweller**” settings in hub settings).

## Detector functionality testing

Having defined the location of the detector and having fixed the device with the bundled adhesive tape, test the detection zone.

Glass Protect does not react to clapping!

## Testing the detector

Hit the glass with your fist without breaking it. If the detector catches a low-frequency sound, the LED blinks. Simulate a high-frequency glass shattering sound for 1.5 seconds after the first hit with a special tool or hitting a glass with a metal object. After recognizing the sound, the detector switches off the LED indicator for a second.

To be triggered when the system is armed, the detector needs to recognize sounds in the following order: low-frequency sound (hit) firstly, then high-frequency sound (glass shattering, shards). Otherwise, the alarm will not go off.

Switch on/off all the appliances that usually operate in the room: generators, air conditioners, etc. If this triggers the detector, try to change the sensitivity or relocate Glass Protect.

Use the sensitivity level, at which the detector correctly passes both test stages and does not respond to any devices operating in the room.

# Installing the device

## Selecting the Location

In some cases, the household activity can cause false alarms

The location of Glass Protect depends on its remoteness from the hub, and obstacles hindering the radio signal transmission: walls, floors, large objects inside the room.

Check the Jeweller signal level at the installation location

If the signal level is low (one bar), we cannot guarantee the stable operation of the detector. Take all possible measures to improve the quality of the signal. At least, move the detector: even a 20 cm shift can significantly improve the quality of signal reception.

If the detector has low or unstable signal strength even after moving, use a ReX Radio signal range extender.

### **Do not install the detector:**

1. outside the premises (outdoors);
2. nearby sirens and speakers;
3. nearby any metal objects or mirrors causing attenuation or screening of the signal;
4. at any places with fast air circulation (air fans, open windows or doors);
5. inside premises with the temperature and humidity beyond the range of permissible limits;
6. Closer than 1 m to the hub.

Glass Protect recognizes glass break at a distance of up to 9 meters. Its microphone should be positioned no more than 90 degrees relative to the window(s).

Make sure that any curtains, plants, furniture, or other objects do not over cover the microphone opening.

If there are curtains on the window, place the detector between them and the window, for instance, at the window side jamb. Otherwise, curtains can mute the glass break sound, and the detector will not be triggered.

## Detector installation procedure

Before installing the detector, make sure that you have selected the optimal location that follows the guidelines of this manual!

1. Fix the Smart Bracket attachment panel using bundled screws. If you use any other attachment tools, make sure that they do not damage or deform the attachment panel.

Use double-side adhesive tape only for temporary attachment of the detector. The tape runs dry with time, which can cause falling, false triggering, and detector malfunction.

2. Put the detector on the attachment panel. When the detector is fixed in Smart Bracket, it blinks with LED, signalling that the tamper is closed.

If LED doesn't blink after fixing in Smart Bracket, check the status of the tamper in the Ajax app and then the fixing tightness of the panel.

If someone detaches the detector from the surface or takes it off the attachment panel, the security system notifies you.


## Connecting a Wired Detector

A wired detector with an NC (normally closed) contact type can be connected to Glass Protect using the in-built terminal clamp.



We recommend installing the wired detector at a distance no longer than 1 meter to Glass Protect. Longer wire length increases the risk of its damage and reduces the quality of communication between the detectors.

To put out the wire from the detector body, break out the plug:

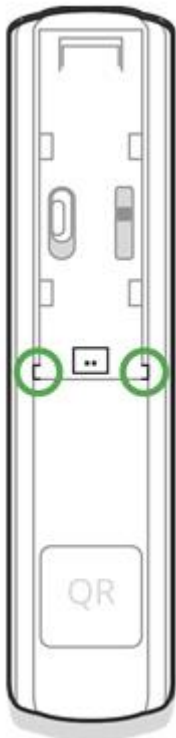

If the connected wired detector is triggered, you receive the notification.

# Maintenance

Check the operational capability of the detector regularly.

Clean the detector body from dust, spider web, and other contaminants as they appear. Use soft dry napkin suitable for tech equipment.

Do not use any substances containing alcohol, acetone, gasoline, and other active solvents to clean the detector.

The pre-installed battery ensures up to 7 years of autonomous operation (with the 5 minutes ping interval by the hub). If the detector battery is low, the system notifies the user, and the LED indicator smoothly lights up and goes off if a glass break is detected or the tamper is triggered.

As soon as the battery charge reaches a 10% level, the app reminds the user to replace the battery.

## Tech specs

Sensitive element	Electret microphone
Glass break detection distance	Up to 9 m
Microphone coverage angle	180°
Tamper protection	Yes
Frequency band	868.0 – 868.6 MHz or 868.7 – 869.2 MHz depending on the region of sale
Compatibility	Operates with Hub, Hub Plus, Hub 2, ReX, ocBridge Plus, uartBridge
Maximum RF output power	Up to 20 mW
Radio signal modulation	GFSK
Radio signal range	Up to 1,000 m (any obstacles absent)
Socket for connecting wire detectors	Yes, NC
Power supply	1 battery CR123A, 3 V

Battery life	Up to 7 years
Operating temperature range	From -10°C to +40°C
Operating humidity	Up to 75%
Overall dimensions	Ø 20 × 90 mm
Weight	30 g
Certification	Security Grade 2, Environmental Class II in conformity with the requirements of EN 50131-1, EN 50131-2-7-1, EN 50131-5-3

## Complete Set

1. Glass Protect
2. Smart Bracket mounting panel
3. Battery CR123A (pre-installed)
4. Outside-mounted terminal clamp
5. Installation kit
6. Quick Start Guide

## Warranty

Warranty for the “AJAX SYSTEMS MANUFACTURING” LIMITED LIABILITY COMPANY products is valid for 2 years after the purchase and does not apply to the pre-installed battery.

If the device does not work correctly, you should first contact the support service — in half of the cases, technical issues can be solved remotely!